


CAMERA CONNECTION BRIDGE VERSION 1.1

DATASHEET

THIS DEVICE WORKS ONLY WITH VCLOUD.AI VSAAS SERVICE AND CAN'T BE UTILIZED AS A STANDALONE CCTV RECORDER

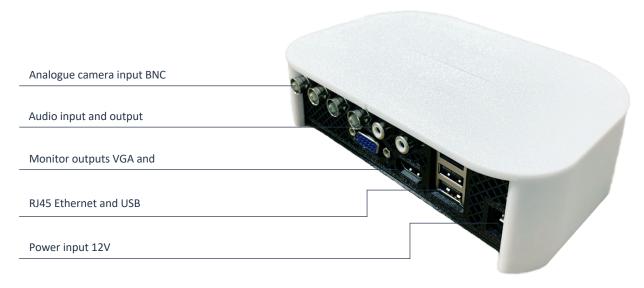

Operating System	Linux
Supported cameras	4x Analogue or 8x IP (1080p@25fps)
Video recording	NO
Video protocols	ONVIF, RTSP, HikVision, Dahua
Audio codec	G.711A
Localization	English, Russian, Arabic, French, Polish, Romanian, Hungarian, Italian, Czech
Dimensions, mm	16.5x11x4.5 (850g)
Power supply	DC12V, 2A
Operating temperature	0 - +55
Warranty	3 years